




CATEGORY 6A S/FTP SOLID CABLE 4 PAIR (AWG 23)



Wave Cables Cat. 6A S/FTP cables are designed to meet the most advanced S/FTP cable applications. Tested to 500MHz, the performance of this cable meets the requirements for PS-NEXT, attenuation, return loss, attenuation-to-crosstalk ratio (ACR) and impedance, making it ideal for high-end transmission links supporting today's networking protocols.

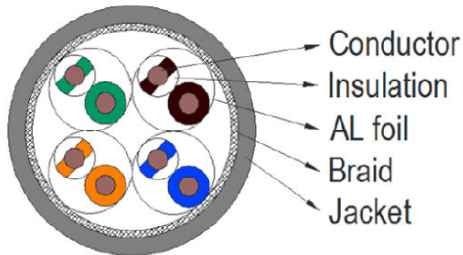

Construction

Twisted Pairs Color Code:
PAIR 1: Blue, White/Blue
PAIR 2: Orange, White/Orange
PAIR 3: Green; White/Green
PAIR 4: Brown; White/Brown

Component

Conductor: AWG 23, 0.555 ± 0.005mm
Insulators: Foam PE (1.335mm, Skin-Foam-Skin)
Foil screen: Aluminium/PET, 50/12µm
Braid: Copper Clad with Steel (0.1mm x 4 x 16)
Jacket: 75°C PVC (Min. Thickness 0.58, Min. Avg. thickness 0.51)
Jacket Diameter: 7.3 ± 0.2mm

Marking

Wave Cables S/FTP SOLID CABLE 23AWG 4PR CAT.6A

Physical Characteristics

Tensile strength: Max. 110N
Temperature Range:

- Installation Temperature 0 to 50°C
- Storage Temperature -20 to 70°C
- Operation Temperature -10 to 60°C

CONSTRUCTION

23AWG bare copper wire insulated with polyethylene. Two insulated conductors twisted together to form a pair and four such pairs cabled to form the basic unit jacketed with flame-retardant PVC. Plastic cross in the middle separates pairs from each other.

APPLICATIONS

Category 6A S/FTP cable is intended for high speed data applications including: IEEE 802.3 1000BASE-T, 10BASE-T, 155 Mb/s ATM, 4/16 Mb/s Token Ring

FEATURES

- Specified and tested to 500 MHz
- Small, round design pairs

BENEFITS

- Reliably supports today's network protocols
- Reduced installation costs and maintenance
- Lower Bit Error Rates, increases network efficiency and uptime

Electric Characteristics

Dielectric strength: DC 1 KV / 60sec. or AC 0.7 KV / 2sec.
Transfer Impedance (Max.): 100mOhms @ 100MHz
Coupling Attenuation (<1GHz): 55dB
DC Resistance Unbalance: 4% max.
Characteristic Impedance: 100±5 Ohms 1~100MHz
Propagation Delay skew: 20ns/100m max.
Velocity of Propagation: 80%



CATEGORY 6A S/FTP SOLID CABLE 4 PAIR (AWG 23)

Transmission Characteristics

FREQ	Attenuation	RL	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	Prop. DELAY
MHz	max. dB/100m	min. dB at 20°C	min. dB	min. dB	min. dB	min. dB	max. ns at 20°C
1	2.1	20.0	75.0	72.3	68.0	65.0	570
4	3.8	23.0	66.3	63.3	56.0	53.0	552
8	5.3	24.5	61.8	58.8	49.9	46.9	547
10	5.9	25.0	60.3	57.3	48.0	45.0	545
16	7.5	25.0	57.2	54.2	43.9	40.9	543
20	8.4	25.0	55.8	52.8	42.0	39.0	542
25	9.4	24.3	54.3	51.3	40.0	37.0	541
31.25	10.5	23.6	52.9	49.9	38.1	35.1	540
62.50	15.0	21.5	48.4	45.4	32.1	29.1	539
100	19.1	20.1	45.3	42.3	28.0	25.0	538
200	27.6	18.0	40.8	37.8	22.0	19.0	537
250	31.1	17.3	39.3	36.3	20.0	17.0	536
300	34.3	16.8	38.1	35.1	18.5	15.5	536
400	40.1	15.9	36.3	33.3	16.0	13.0	536
500	45.3	15.2	34.8	31.8	14.0	11.0	536